



Plastic Pipes & Fittings Factory
Yousif Khalid Al-Adasani Ent.



**U-PVC SEWAGE & DRAINAGE
PIPING SYSTEM**



U-PVC Sewage & Drainage Pipes Dimensions as per DIN 19531, 19534, 8062 & KUWAIT Standard 1092

Nominal outside diameter	wall thickness, s, mm			Socket Dimensions mm			
	O.D,mm	N	R ₁	R ₂	d ₁	d ₂	LSS,t
50	1.8	-	2.2	50.3	59.6	50.0	48
75	1.8	-	2.2	75.4	84.6	70.0	55
110	2.2	3	3.2	110.4	120.6	100.0	76
160	3.2	3.6	4.7	160.5	174.3	125	100
200	-	-	4.5	200.6	216.0	150	120
250	7.3	-	6.1	250.6	272.9	165	140
315	9.2	-	7.7	315.7	338.9	200	160
400	11.7	-	9.8	400.8	427.1	220	190

LSS = Length of Solvent Cement Socket

LRS = Length of Rubber Ring Socket

N, R₁, R₂ wall thickness according to DIN 19531 / 19534 / 8062


Dimensions of Sewage & Drainage pipes as per BS, DIN EN and BS EN Standards

DN (inch)	BS ST. W.T. (mm)					BS EN / DIN EN W.T. (mm)					
	O.D mm	5255	4514	4660	5481	DN/OD	1329-1		1401-1		
							B	BD	SDR 51	SRD 41	SDR 34
-	-	-	-	-	-	32	3.0	-	-	-	-
1¼	36	1.8	-	-	-	36	3.0	-	-	-	-
-	-	-	-	-	-	40	3.0	-	-	-	-
1½	43	1.9	-	-	-	43	3.0	-	-	-	-
-	-	-	-	-	-	50	3.0	-	-	-	-
2	56	2.0	-	-	-	56	3.0	-	-	-	-
-	-	-	-	-	-	75	3.0	3.0	-	-	-
3	82	-	3.2	-	-	82	3.0	3.0	-	-	-
4	110	-	3.2	3.2	-	110	3.2	3.2	-	3.2	3.2
-	-	-	-	-	-	125	3.2	3.2	-	3.2	3.7
6	160	-	3.2	4.1	-	160	3.2	4.0	3.2	4.0	4.7
8	200	-	-	-	4.9	200	3.9	4.9	3.9	4.9	5.9
10	250	-	-	-	6.1	250	4.9	6.2	4.9	6.2	7.3
12	315	-	-	-	7.7	315	6.2	7.7	6.2	7.7	9.2
16	400	-	-	-	9.8	400	-	-	7.9	9.8	11.7

B: Application area code for components intended for use above ground inside building or for components outside buildings fixed onto the wall

D: Application code for the area under and within 1 m from the building where the pipes and fittings are buried in ground and are connected to the underground drainage and sewerage system

BD: Application area code for components intended for use for both code B and code D application area

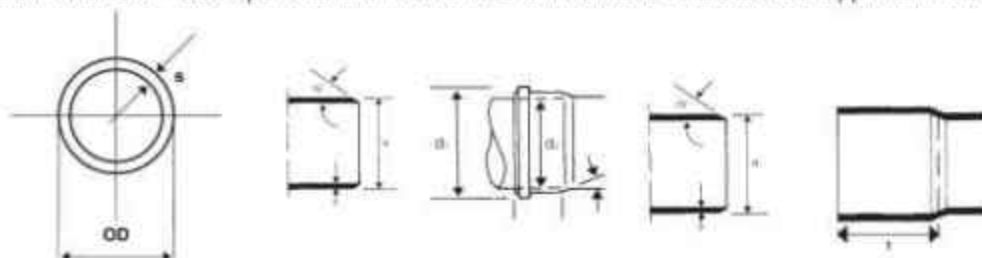


U-PVC Sewage & Drainage Fittings

DIN 19531, 19534 DIN EN /BS EN 1329/1401 and the Public Authority for Housing Welfare - Kuwait

Bends 45° *(BER)

كوع 45° بحلقة مطاطية


d ₁	α = 45°		W.T. S	te
	Z ₁	Z ₂		
50	13	19	3.5	53
75	18	24	3.5	61
110	25	31	3.5	80
160	36	44	4.8	95



Bends 87.50° *(BER)

كوع 90° بحلقة مطاطية


d	α = 87.50°		W.T. S	te
	Z	Z ₁		
50	28	31	3.5	54
75	40	43	3.5	64
110	57	61	3.5	80
160	83	89	4.5	85



Tee Branch 87.5° *(TR & TRR)

تي بحلقة مطاطية 87.5°


d	d ₁	α = 87.50°			W.T. S	te
		Z	Z ₁	Z ₂		
50	50	25	32	39	3.5	53
75	50	27	43	47	3.5	62
75	75	43	51	51	3.5	62
110	50	43	68	45	3.5	80
110	75	40	68	45	3.5	78
110	110	57	68	62	3.5	80
160	160	83	90	83	4.5	81
160	110	62	86	59	4.5	92



Tee Branch 45° *(YR & YRR)

واي بحلقة مطاطية


d	d ₁	α = 45°			W.T. S	te
		Z ₁	Z ₂	Z ₃		
50	50	13	60	60	3.5	55.5
75	50	1	78	73	3.5	62.0
75	75	19	91	91	3.5	64.0
110	50	17	103	91	3.5	81.0
110	75	1	116	108	4.0	80.0
110	110	25	133	133	4.0	81.0
160	110	2	167	159	4.8	96.0
160	160	36	193	193	4.8	96.0



Coupler with Sleeve *(CORS)

وصلة ربط بحاجز بحلقة مطاطية


d_1	W.T. s_1	L
50	3.3	113
75	3.3	134
110	3.5	160
160	4.8	200



Repair Coupler without Sleeve *(COR)

وصلة تصليح بدون حاجز بحلقة مطاطية


d_1	W.T. s_1	L
50	3.3	113
75	3.3	134
110	3.5	160
160	4.8	200



Connecting Reducer *(RER)


محول بحلقة مطاطية

d_1	d_2	W.T.		z	to
		s_1	s_2		
75	50	3.3	3.3	28	64
110	50	3.3	3.3	42	78
110	75	3.5	3.3	26	77
160	110	4.8	3.5	42	97



Socket Plugs (SP) , سدّه


d	W.T. s_1	L
50	2.5	20.0
75	2.8	25.0
110	3.5	31.5
160	4.2	40.0



WC - P - Traps (PT)*

كوع مدفع لصق + كوع مفتوح


d_1	h_1	h_2	h_3	L
110	150	25	222	360



WC - U - Traps (UT)*

يو تراب لصق



d_1	h_1	h_2	h_3	L
110	150	108	182	263



Floor Traps (FDI)

مصرف ارضي بمدخل مفتوحة

size	A	B	C	D	E	F	G	H	K	L	O	O'
6" 1/4" 1/2"	168	64.5	38.5	14.0	110.5	36.0	26.0	58.0	76.0	160.5	37.5	30.0
6" 3/8" 1/2"	168	64.5	38.5	13.5	75.2	71.0	26.0	58.0	76.0	160.5	40.0	30.0




Floor Traps

مصرف ارضي بثلاث مدخل مفتوحة

CODE	Size	A	B	B'	C	D	E	E'	F	G	H	K	L
FT	4" 1/3" 1/2"	130	17.0	14.0	120.5	21.0	83.0	75	13.5	37.5	27.0	29.0	58.0
	4" 1/2" 1/2"	130	17.0	14.0	120.5	32.0	57.5	50	29.5	37.5	27.0	29.0	58.0
FTS	4" 1/3" - 2 1/2" 1/2"	117	16.5	18.5	101.5	14	75	63	12.5	41	32	10.5	56.5
	4" 1/2" 1/2"	117	16.5	18.5	101.5	22.5	57.5	50	22	32	32	10.5	56.5

FT

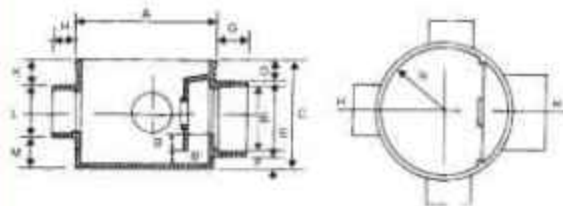



FTS



Mini Floor Trap (MFT)

مصرف ارضي صغير


size	A	B	C	F	P	K	L	N	R	H	O	O'
4"x 2"	44.8	31.3	42.5	4.1	50.1	6.0	116.7	3.1	55.0	70.4	9	16

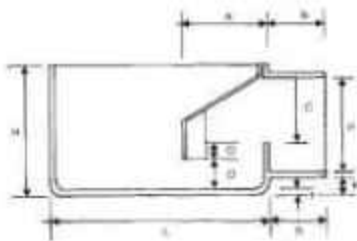

Square Hopper (SH)

صفحة مطر مربع + غطاء شبك



d	a	b	c	h	x	y	L
110	17	25	30	90	164	147.5	13



Floor Clean out (FCO)

فتح ارضية للتنظيف


A	A*	B	C	D	E
70.0	177.0	60.5	72	33	110



Floor Trap Extension (FDEA)

وصلة تطويل المصرف الارضي



Size	A	B	C	E
4"	90	12	78	121.3
6"	81	9	72	168.1



Inspection Cover (ICO) 160/110 mm

غطاء طيبة تسليك

L	d ₁	d ₂	d ₃	h ₁	h ₂	h ₃	R ₁	R ₂	R ₃	R ₄
200	130	168	126.6	7	23	5	54.25	60	63.75	63.3




Floor Trap Cover 160 mm Perforated (FDG)**

غطاء مصرف ارضي شخال


d ₁	168
t	4.2
h1	30.0
h2	15.5
R	84.0
L	200.0

d ₁	d ₂	d ₃	d ₄	h ₁	h ₂	R ₁	R ₂
146	168	158	149	16	20	84	79

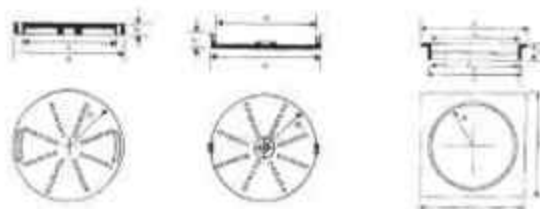

Floor Trap Cover 160 mm Blind for Clean out (FDK)**

غطاء طيبة تسليك

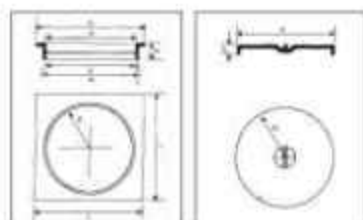




d ₁	t	h ₁	h ₂	R	L	d ₁ *
168	4.2	30	15.5	84	200	168



Mini Floor Trap Cover (MTC)**

غطاء مصرف ارضي صغير

R ₁	R ₂	Z	A	B	C	D	E	F	G	H	K	N	L
47.8	61	13.2	147	18.4	4.3	14.1	7.8	6.8	8.0	22.6	12.5	6.0	110

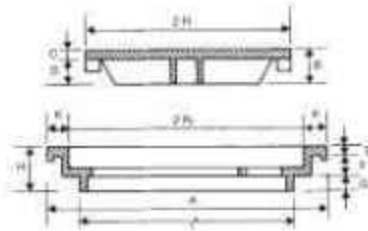



Floor trap Cover 160/110 mm (FTC)**

غطاء مصرف ارضي بباب

L ₁	t	R ₁
118	4	59



L	D ₁	D ₂	D ₃	h ₁	h ₂	h ₃	R ₁	R ₂	R ₃	R ₄
200	130	168	126.6	7	23	5	54.25	60	63.75	63.3



Ventillation Cowl (VC)

ظريوش تهويه


d ₁	d ₂	h ₁	h ₂	R ₁	R ₂
50	63.0	35.5	42.5	25.1	60.4
75	87.1	35.5	42.5	37.6	60.4
110	123.0	42.0	43.0	55.0	80.5



Bends 87.50° Double Socketed (BEDS)

كوع 90° براسين لصق


d ₁	d ₂	L	X
50	56.5	90.0	33.0



Bends 45° Double Socketed (BEDS)

كوع 45 براسين لصق

d_1	d_2	h_1	h_2	L
50	56.5	34.0	24.0	21.0




CI /PVC Connector (CCID)

محول فونت الى بلاستيك

	d_1	d_2
DN100/100	110	102


Note: Sizes 50mm & 75mm are available



Access Plug with Threaded Cap (APTC)

سدّه بسن لتسليك

d_1	A	B	E
110	27.0	99.5	121.5




Bends 90° with Nickle plated female thread (BNFT)

كوع بسن معدني زاوية مهابر

$d_1 \times d_1''$	d_2	d_2'	L
50 x 1 1/2"	58	58	31


Also available with plastic thread (BSFT)



Tee Equal All Socketed (TDS)

تي براسين لصق


d_1	d_2	L	h	X
50	56.5	127	92	36



Flush pipe (FP)**

انبوب صندوق الطرد

d_1	Fig	L_1	L_2	h_1	h_2	h_3	h_4
32	a		280	970			
32	a		320	1250			
32	b	100			575	245	128
32	b	156			575	240	125



British System Drainage U-PVC Pipes Fittings


U-PVC Fittings as per BS Std. 4660/4514 BS EN 1329 /1401

Elbow 87.50°

Rubber Ring Joint (BEAR)

كوع 87.5° بحلقة مطاطية


d	Z ₁	Z ₂
110	87	87



Elbow 45° Rubber Ring Joint (BEAR)

كوع 45° بحلقة مطاطية


d	Z ₁	Z ₂
110	37	37
160	44	44



Tee 87.5° Rubber Ring Joint (TEAR)

تي 87.5° بحلقات مطاطية من جميع الجهات


d	Z ₁	Z ₂	Z ₃
110	87	87	57



(Y) Branch 45° Rubber Ring Joint (YBAR)

واي بحلقات مطاطية من جميع الجهات


d	d	Z	Z ₁	Z ₂
110	110	40	136	136
160	110	4	168	158
160	160	46	193	193



PTBR

كوع مدفع


d ₁	h ₁	h ₂	L
110	193	248	325



Coupler (COAR)

وصلة ربط بحلقات مطاطية


d_1	L
110	125
160	155



Reduced Socket End (REAR)

محول بحلقة مطاطية


d	d_1	z	t_e
160	110	46	90



COUPLER, COAS

وصلة ربط


d_1		d_2	L
inches	mm		
2	56	62	64
3	82	92.7	92



ELBOW 87.5° BEAS

كوع 87.5°


d		Z_1	Z_2
inches	mm		
2	56	44	44
3	82	75	75



ELBOW 45° BEAS

كوع 45°


d		Z_1	Z_2
inches	mm		
2	56	16	16
3	82	38	38



TEE 87.5° TEAS

87.5° تي


d		Z ₁	Z ₂	Z ₃
inches	mm			
2	56	44	44	27
3	82	74	85	29



Y BRANCH 45° (YBAS)

45° واي


d		d ₁	Z ₁	Z ₂	Z ₃
inches	mm				
2	56	56	41	32	43
3	82	82	64	46	66



REDUCER, (REAS)



محول

d		d ₁	te
inches	mm		
3 x 2	82 x 56	56	47
4 x 2	110 x 56	56	47
4 x 3	110 x 82	82	47



Floor Traps (FT-BS)

Size mm	A	B	C	D	E	F	G	H	I	J	K	L	M	N
110x82x56	117.5	82	56	163.0	74.0	26.0	110.0	10.0	48.0	30.0	23.0	23.0	43.0	2°

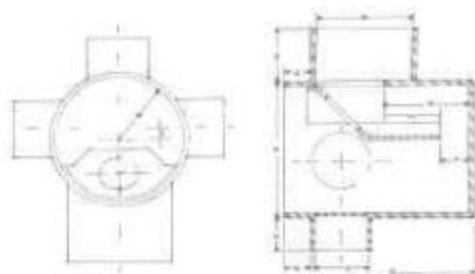

Note : All measurement in mm otherwise metioned. For other sizes of fittings not listed in this catalogue or other types of pipe accessories please contact our sales department.

- * 1) 50 and 75 mm sizes are available in grey colour with rubber ring or solvent cement joints.
- 2) 110 mm size is available in grey and orange colour with rubber ring or solvent cement joints.
- 3) 160 mm available in orange colour with rubber ring joints.

** Other colours available upon special request.